

TSC80 CONTROLLER
FACTORY SETTINGS

ENGINE START TIMER:	3	(0-60sec)
ENGINE WARM-UP TIMER:	2	(0-60sec)
ENGINE COOL DOWN TIMER:	2	(0-30min)
UTILITY RETURN TIMER:	2	(0-30min)
NEUTRAL DELAY TIMER:	3	(0-60sec)
TRANSFER FAIL TIMER:	30s	(FIXED)
EXERCISE TIMER:	30min/7Day	(FIXED)
UTIL U/V TIMER:	0s	(FIXED)
GENERATOR U/V TIMER:	3s	(FIXED)
GENERATOR U/F TIMER:	3s	(FIXED)
UTILITY U/V (DO):	85%	(70-95%)
UTILITY U/V (PU):	90%	(5% > DO)
GENERATOR U/V (DO):	85%	(70-95%)
GENERATOR U/V (PU):	90%	(5% > DO)
GENERATOR U/F:	90%	(70-90%)

ALL SETTINGS ARE FIELD ADJUSTABLE UNLESS NOTED

TRANSFER SWITCH
WIRING OPTIONS


ENCLOSURE HEATER EXT. PWR (TS-H1)	<input type="checkbox"/>
ENCLOSURE HEATER INT. PWR (TS-H2)	<input type="checkbox"/>
LOAD DISTRIBUTION BREAKERS REFER TO DWG 840E005 [QTY]	<input type="checkbox"/>

UTILITY SWITCHING DEVICE

MOLDED CASE SWITCH	<input type="checkbox"/>
THERMAL MAGNETIC	<input type="checkbox"/>
ELECTRONIC (LI)	<input type="checkbox"/>
POLES: _____	
TRIP RATING: _____ A	
WITHSTAND RATING: _____ KA @ 240 V	

GENERATOR SWITCHING DEVICE

MOLDED CASE SWITCH	<input type="checkbox"/>
THERMAL MAGNETIC	<input type="checkbox"/>
ELECTRONIC (LI)	<input type="checkbox"/>
POLES: _____	
TRIP RATING: _____ A	
WITHSTAND RATING: _____ KA @ 240 V	

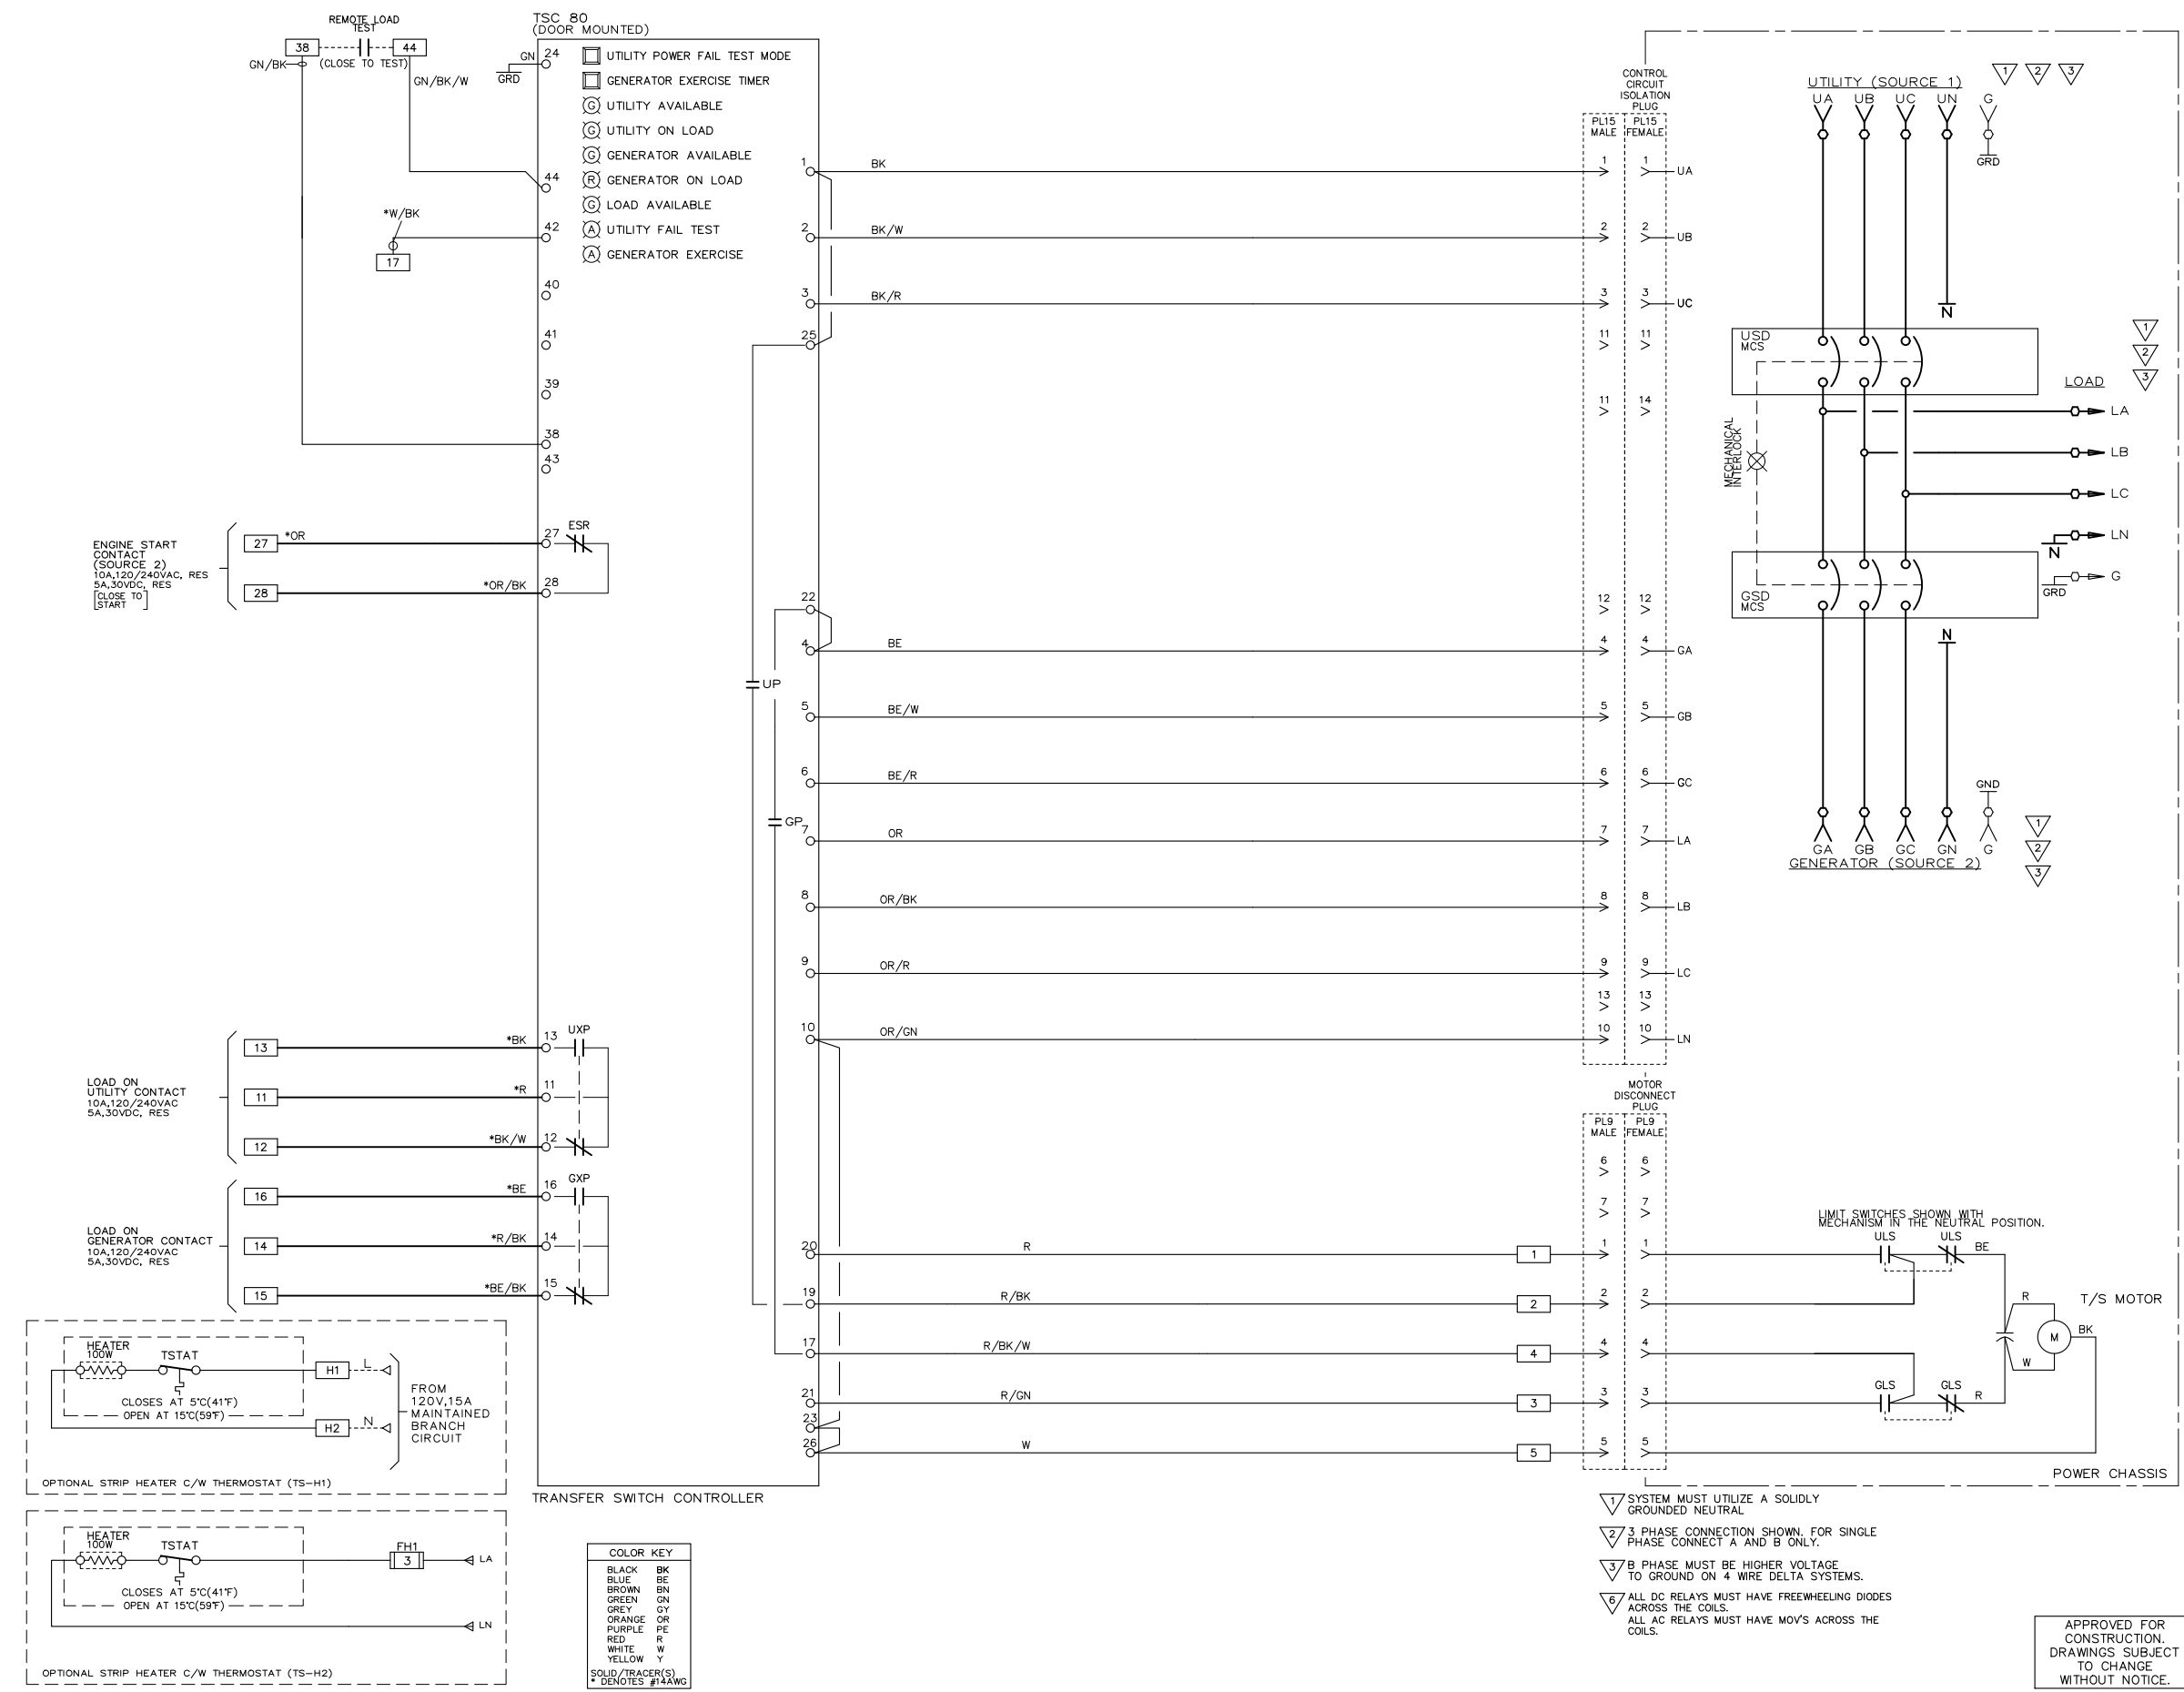

- 1 SYSTEM MUST UTILIZE A SOLIDLY GROUNDED NEUTRAL
- 2 3 PHASE CONNECTION SHOWN, FOR SINGLE PHASE CONNECT A AND B ONLY.
- 3 B PHASE MUST BE HIGHER VOLTAGE TO GROUND ON 4 WIRE DELTA SYSTEMS.
- 4 ALL DC RELAYS MUST HAVE FREEWHEELING DIODES ACROSS THE COILS. ALL AC RELAYS MUST HAVE MOV'S ACROSS THE COILS.

APPROVED FOR CONSTRUCTION. DRAWINGS SUBJECT TO CHANGE WITHOUT NOTICE.

DRAWINGS AND/OR OTHER TECHNICAL INFORMATION SUPPLIED BY THOMSON POWER SYSTEMS AS A PART OF A SALE OF EQUIPMENT ARE FOR THE PURCHASER'S USE SOLELY IN CONJUNCTION WITH THAT EQUIPMENT, UNLESS SPECIFICALLY AGREED TO OTHERWISE AS A PART OF THE TERMS OF SALE.

APPROVED FOR CONSTRUCTION
 MASTER COPY REFERENCE COPY OF _____
 MULTIPLE UNIT WORK ORDER
 RELEASED FOR INFORMATION
 AUTH. BY: OG DATE: 07-06-26

No.	REVISIONS	BY	DATE
9	LOGO CHANGED	LR	14-01-30
8	UPDATED HEATER OPTIONS	PQ	08-10-16
7	ADDED TERMINALS 2 AND 4	BMG	08-05-06
6	CHANGED SINGLE PHASE WIRING FROM A-C TO A-B	BMG	08-03-27
5	REMOVED ADDITIONAL CAPACITOR(W/ LATCHING RELAYS) FROM MOTOR CCT	BMG	07-10-10

No.	REVISIONS	BY	DATE
9	LOGO CHANGED	LR	14-01-30
8	UPDATED HEATER OPTIONS	PQ	08-10-16
7	ADDED TERMINALS 2 AND 4	BMG	08-05-06
6	CHANGED SINGLE PHASE WIRING FROM A-C TO A-B	BMG	08-03-27
5	REMOVED ADDITIONAL CAPACITOR(W/ LATCHING RELAYS) FROM MOTOR CCT	BMG	07-10-10



AUTOMATIC TRANSFER SWITCH
 MODEL TS 84_A ___ A1 ___ 1 ___ A ___
 SCHEMATIC DIAGRAM
 ___ A, ___ V, ___ Ø ___ W, ___ Hz

CUSTOMER ORDER No.	WORK ORDER No.
DRAWN BY: BMG	AUTH BY: OG
DATE: 07-07-24	REV: 9
DRAWING/FILE No. 840E006	SHEET 1/1